


AV over IP Transceiver, 10G SDVoE with FO - Zero Latency - ALT-IPT4KSDV

- > HDMI 2.0b and HDCP 2.2 compatible
- > Video resolution up to 4K@60Hz 4:4:4, 18 Gbps video bandwidth
- > Encoder or Decoder modes can be set at the touch of a button or via the API
- > Automatic detection of fiber and copper ports (adjustable priority)
- > Support for all HDMI audio formats
- > Support for signal extension, seamless switching, matrixing, video wall up to 9x9 and MultiView up to 25 windows
- > Integrated H.264 /H.265 (SS) for preview
- > Supports USB2.0 (KVM), CEC routing control
- > IR control, RS-232, TCP/IP, Web GUI
- > PoE standard (PD 802.3at device)



4K60 4:4:4 4K60	HDMI 18 Gbps	SDVoE SDVoE	Dante Dante
60 Seamless Switching	Multiview	USB 2.0	RS232 RS232

DIAGRAM

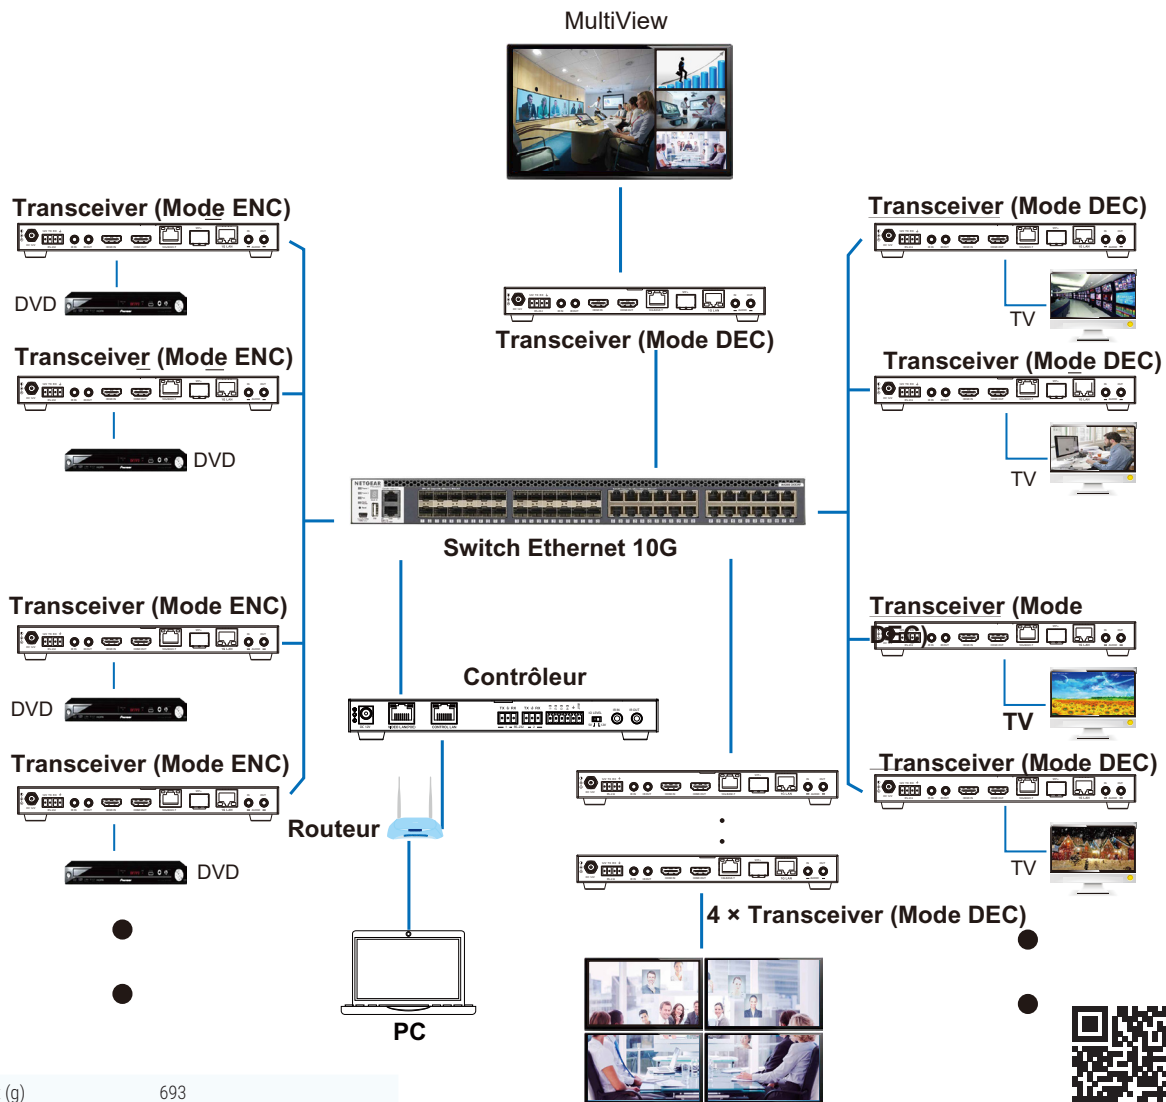

Weight (g)	693
Dimensions WxDxH (mm)	204 x 134 x 21.5
Consumption	In : AC100 - 240V 50/60Hz Out : DC 12V/2.5A; ≈13.5W