


AUDIO

Audio amplifier 2x50W - AMP250

- › Web user interface for TCP/IP
- › Adjustable Bass, Treble & Volume
- › LOOP output for cascading to another amp
- › 4pts captive screw power connector
- › Class D: does not consume power when not in use
- › Stereo or Bridge output selection
- › Controllable via front panel knob, RS232, IR, and TCP/IP
- › MIC signal can be mixed with line audio signal and adjusted separately
- › Fast switching



DIAGRAM

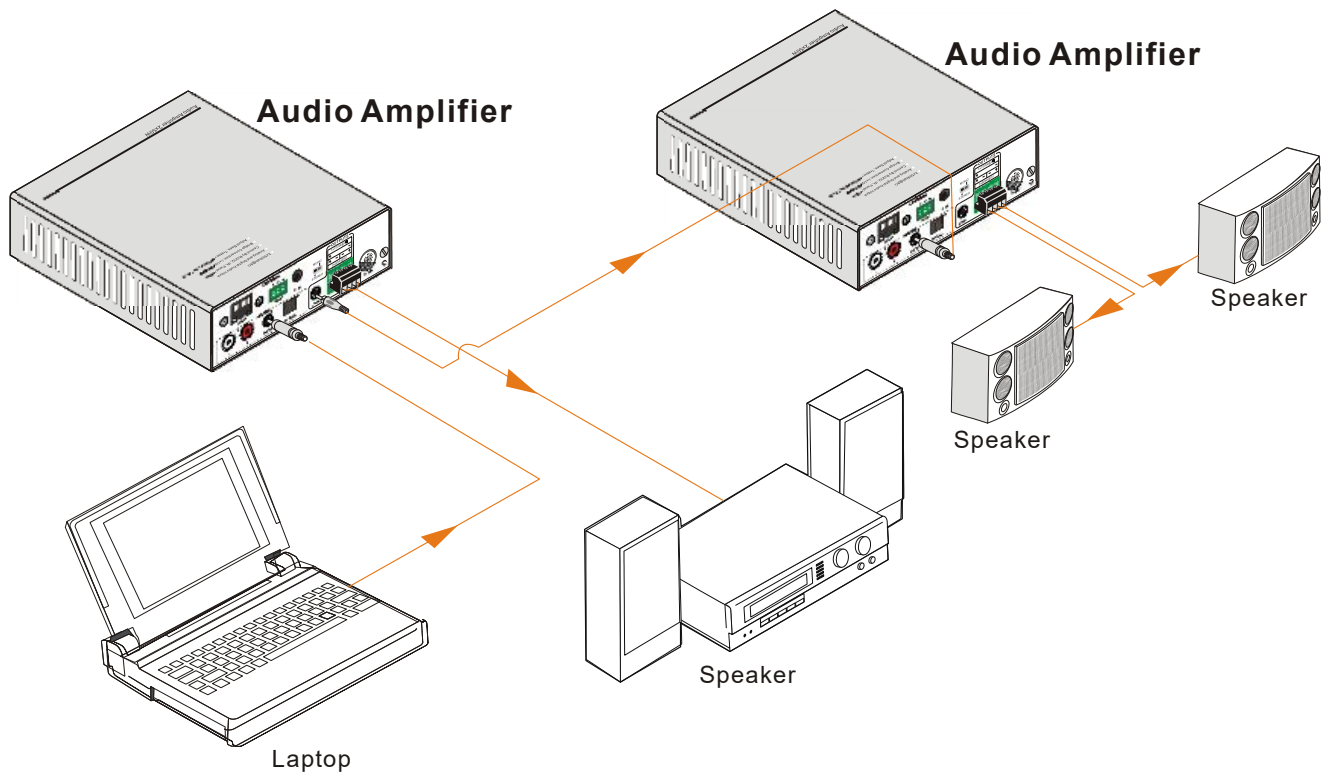

Weight (g)	720
Dimensions WxDxH (mm)	148 x44 x165
Consumption	DC 36V 2.66A 1.48W

