

# HDBASE-T




## HDBaseT Extender e-ARC/USB 8K@30Hz 4:4:4 - TP100P-8K

- > HDMI 2.1, HDCP 2.3 compatible
- > **Up to 40 Gbit/s** FRL, 8K@30 4:4:4 10-bit, 4K@120Hz 4:4:4 10-bit
- > VRR, FVA, ALLM supported
- > HDR, HDR10, HDR10+, Dolby Vision transition
- > LPCM 7.1CH, Dolby TrueHD and DTS-HD Master Audio
- > Up to **100 meters** using CAT6/6A cable
- > **Bidirectional video and audio** (Rx to Tx 1080p24)
- > **eARC/ARC from RX to TX**
- > High-speed USB 2.0 transmission, LAN and bidirectional IR and RS-232
- > Bidirectional 24 V POC (cable-powered)



### DIAGRAM

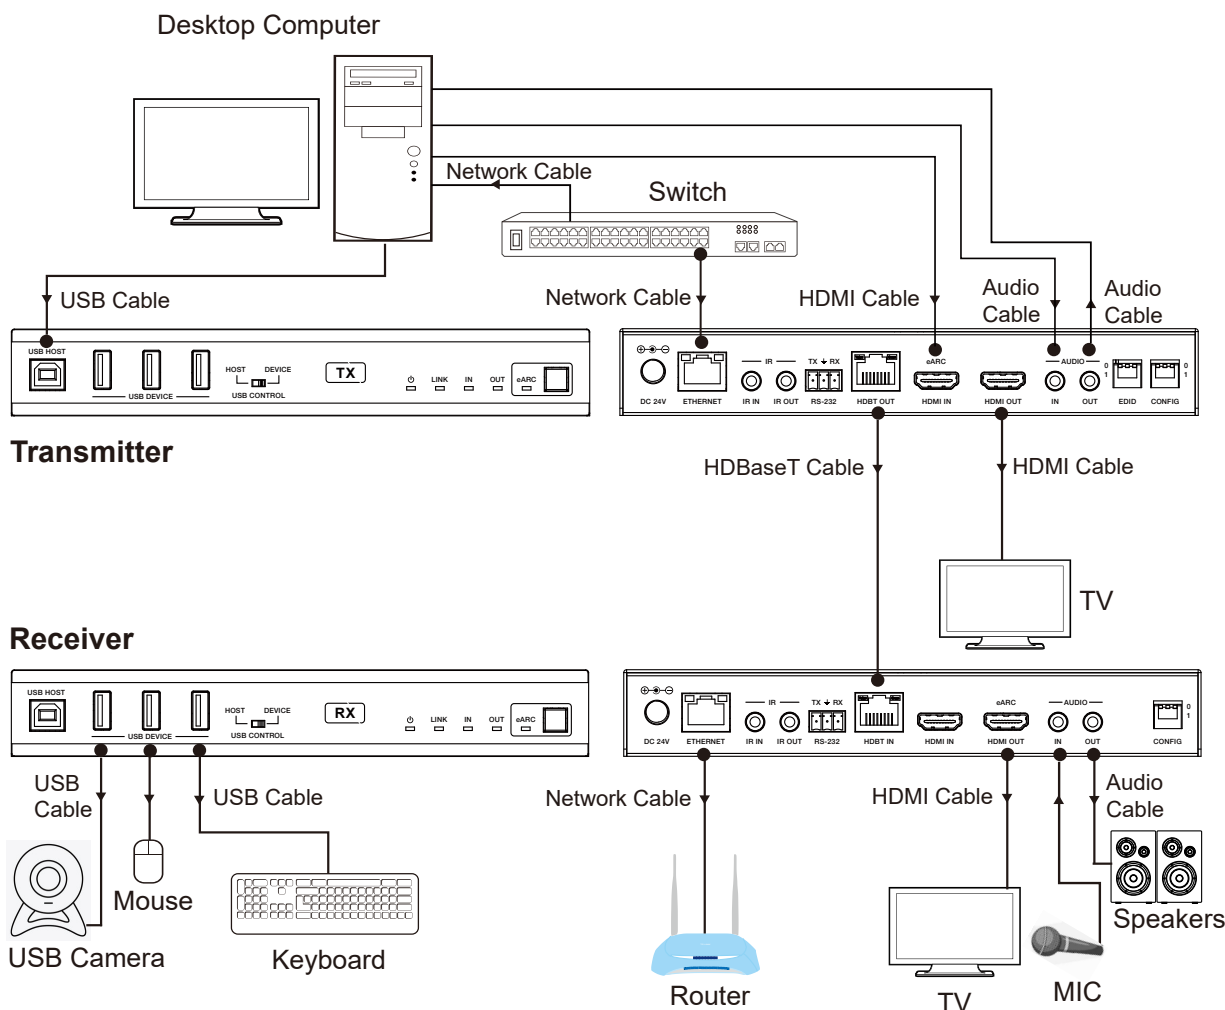

Weight (g)	Tx : 571g, Rx : 571g
Dimensions WxDxH (mm)	Tx / Rx : 200 x 100 x 30
Consumption	In : AC 100 - 240V 50/60Hz, Out : DC 24V/2.7A Conso totale : 20.4W (POC) TX/RX pleine charge : 9.36W/9.84W; TX/RX en veille : 2.46W/3.36W

